


**Non Relubricatable Series**

**Round Bore**

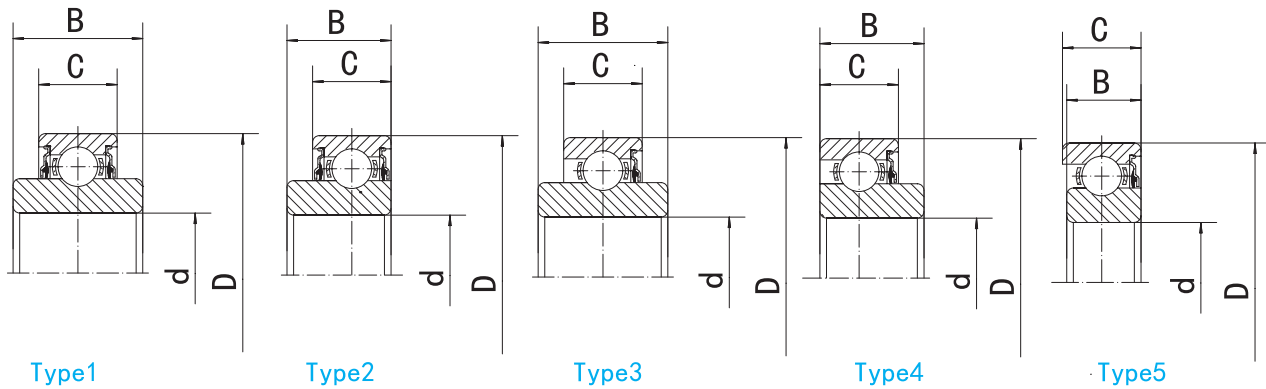

Bearing NO.	Type	Dimensions ( in./mm )				Dynamic load ratings (N)	Static load ratings (N)	Weight (kg)
		d	D	C	B			
203KR2	4	0.6250 15.88	1.5748 40	0.4720 12	0.5510 14	12800	6650	0.077
203KRR2	1	0.6400 16.26	1.5748 40	0.4720 12	0.7200 18.29	12800	6650	0.085
203KRR5	1	0.5150 13.08	1.5748 40	0.4720 12	0.7200 18.29	12800	6650	0.096
203KRR6	1	0.6400 16.26	1.8504 47	0.4720 12	0.7200 18.29	12800	6650	0.130
203KRR7	1	0.6690 17	1.5748 40	0.4720 12	0.6540 16.61	12800	6650	0.079
204KR2	4	0.7505 19.063	1.7805 45.23	0.6100 15.49	0.6100 15.49	12800	6650	0.107
204KRR3	1	0.7874 20	1.8504 47	0.5510 14	0.6990 17.76	12800	6650	0.121
204KRD4	2	0.6300 16	1.8504 47	0.5510 14	0.6890 17.5	12800	6650	0.135
204KRR14	1	0.6300 16	1.8504 47	0.5910 15	0.7200 18.29	12800	6650	0.142
205KR3	5	0.7500 19.05	2.0472 52	0.6992 17.76	0.6402 16.26	14000	7850	0.161
205KR4	3	1.0005 25.41	2.0472 52	0.5910 15	1.0000 25.4	14000	7850	0.148
206KR7	3	1.1810 30	2.4410 62	0.6300 16	0.9450 24	19450	11250	0.260
206KRR8	1	1.1810 30	2.4410 62	0.6300 16	0.9450 24	19450	11250	0.260
206KRR18	1	1.2598 32	2.4410 62	0.6300 16	0.9450 24	19450	11250	0.219
207KRR	1	1.3780 35	2.8346 72	0.6690 17	0.9840 28	25700	15200	0.350
208KRR2	1	1.5748 40	3.1496 80	0.8270 21	1.0630 27	29500	18100	0.450
210KRR	1	1.9685 50	3.5433 90	0.7874 20	1.1810 30	35000	23200	0.524
214KRR	1	2.7559 70	4.9212 125	1.1024 28	1.6929 43	62100	44800	1.546